





Part # 12109120 - 1967-1970 Mustang Front SwayBar

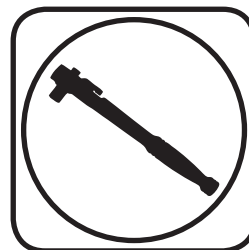

Recommended Tools



1967-1970 Mustang Front SwayBar Installation Instructions

Table of contents

Page 2..... Included Components and Hardware List
Page 2-3..... SwayBar Installation

Hardware Torque Specifications

M10-1.5..... 37 ftlbs
3/8"-16..... 35 ftlbs

www.ridetech.com



Major ComponentsIn the box

Part #	Description	QTY
90002952	SwayBar	1
90002953	Bushing Strap Spacer	2
70012402	Delrin SwayBar Bushing	2
90002539	Poly SwayBar Bushing	2
90002572	SwayBar Bushing Strap	2
90001258	SwayBar End Link T-Bushing	4
END LINK ASSEMBLY		
90001256	90 Degree End Link Adapter	2
90002571	90 Degree End Link	2
99375008	3/8"-16 x 3" Threaded Stud	2
90002930	End Link Kit	2

HARDWARE LIST

QTY	Part Number	Description
4	99371007	3/8"-16 x 1 1/2" Hex Bolt
8	99373002	3/8" SAE Flat Washer
4	99372001	3/8"-16 Nylok Nut


Getting Started.....

This SwayBar Kit utilizes a Delrin Liner in the SwayBar Bushing. The Delrin Liner allows the SwayBar to move freely and quietly in the Bushing. The Delrin is self-lubricating, no lubrication is required.

1. Jack the vehicle up to a safe working height and support with jack stands. Make sure the jack stands are stable before working under the car.
2. Remove the stock sway bar.



4. Open the delrin liner at the split and slip it over the swaybar. Position it in the area that the bushing will ride based on the location of the stock swaybar. Do this on both ends of the swaybar. Next, open the swaybar Bushing at the split and slide it **OVER** the delrin liner. Do this on both delrin liners.

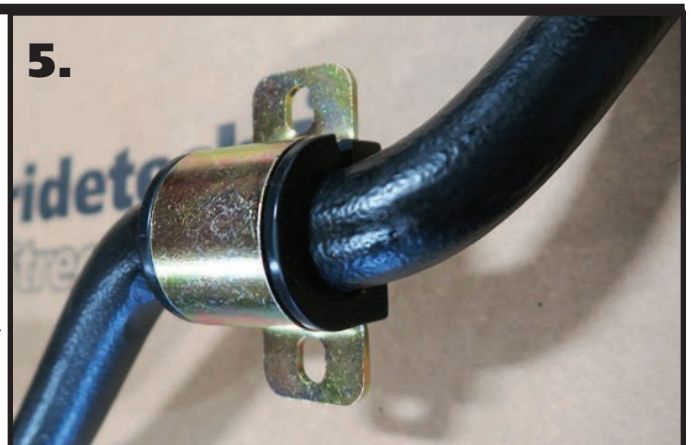


5. Slip the bushing straps over the swaybar bushings.



6.


6. Install the sway bar in position in the car. The center of the bar should be to the front of the car. The outer arms of the sway bar will bend upward. Use **Picture 6** as a reference.

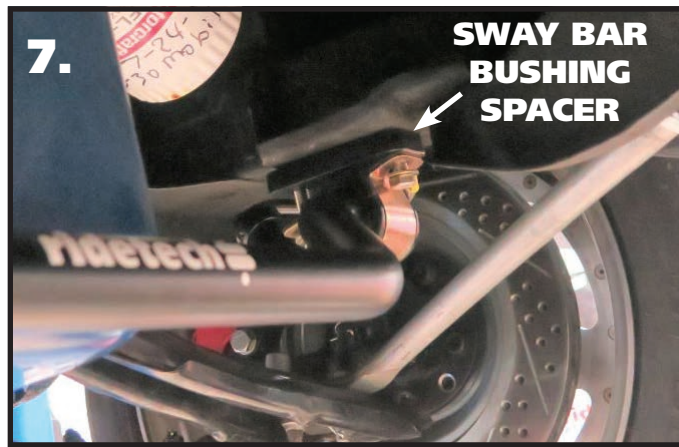

7.

**SWAY BAR
BUSHING
SPACER**

7. Install a 3/8" flat washer on each of the (4) 3/8" x 1 1/2" bolts. The sway bar bushing spacer will be installed between the sway bar bushing and frame. Push the bar up to the frame, installing the spacer in place. Hold it in position and install (2) bolt/washers in each side. Install a 3/8" flat washer & 3/8" nylok nut on the bolts and snug the hardware.

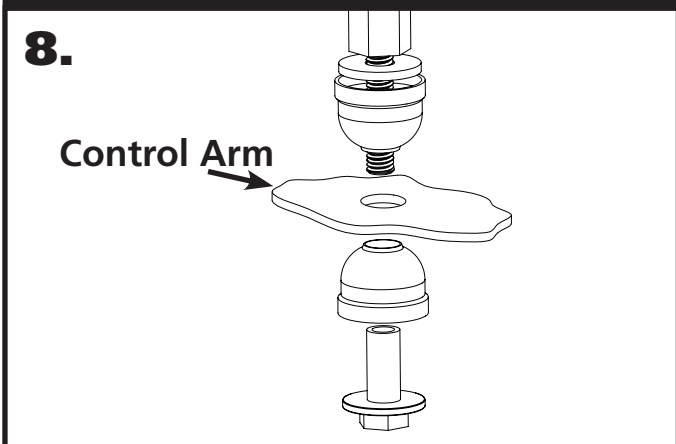

8.

Control Arm

8. Install the End Links using **Diagram 8** as a reference. Tighten the end link barrel nut until it is flush with the end of the bolt, and then tighten it 2 more complete rounds.



9.

9. Install a T-Bushing on each of the 90 degree end links. The t-bushings are installed with the large diameter against the shoulder of the end link.



10.

10. Insert the 90 degree end link/t-bushing into the swaybar end with the threads pointing toward the engine. Install a 2nd t-bushing with the small diameter into the swaybar. Install the nut and torque. Do this for both sides.

11. Torque the swaybar mounting hardware.