



VHX-65F-MUS

Dakota Digital VHX Instrument Installation
For 1965 Ford Mustang - GT and Pony style interiors only
1966 Ford Mustang - All interiors

Your new VHX-65F-MUS kit includes:

Adapter, Ford
Speed Sensor

Universal
Sender Pack

Installation Manuals

CAT5 Cable

4 x 6-20x1"
Screws


Control Box



VHX Display

Installation

1. Remove the stock instrument system from the dash. Remove the eight (8) screws holding the gauges to the bezel on the back of the system.

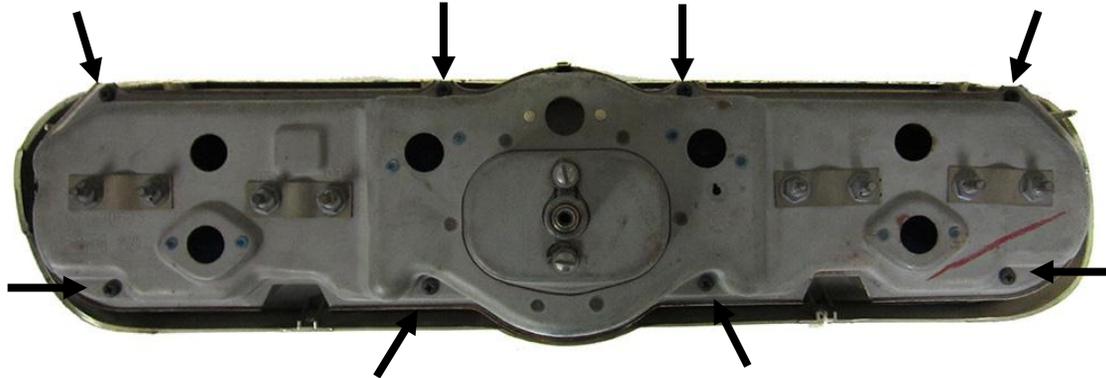


2. Remove the stock gauges and lens from the bezel. The only items to be reused are the original front bezel and four (4) of the stock mounting screws; the other pieces can be discarded. Now is a good time to clean the bezel or upgrade to a new one.




3a. Remove the protective tape from the clear lens and install the VHX system into the bezel. Watch carefully as you insert the system so you don't scratch or damage the lens.




3b. Align the four (4) holes on the bottom of the VHX display with the four (4) mounting bosses on the bezel. Once aligned, the VHX display should slip easily into the bezel until fully seated, with no gap between the lens and bezel.

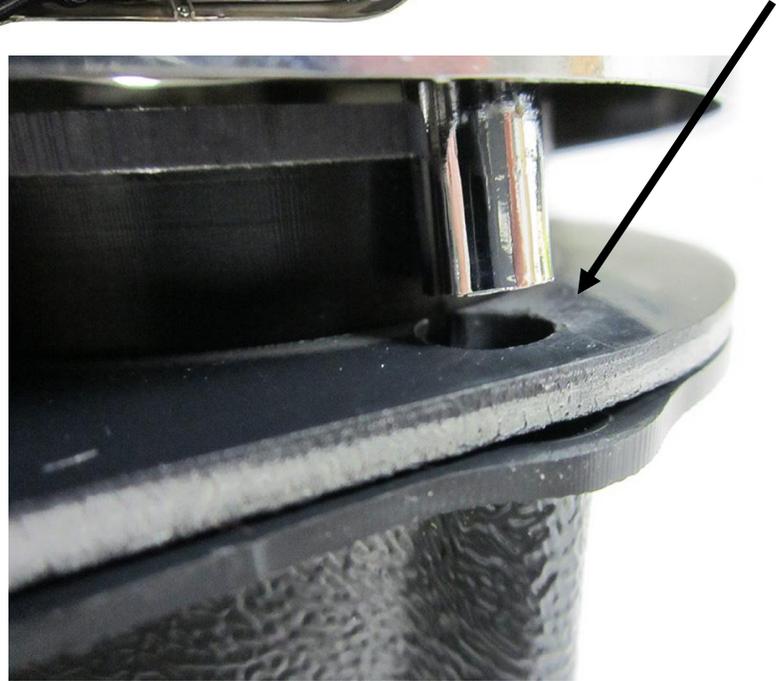

4. Secure the VHX system to the bezel using the four (4) provided 6-20x1" screws in the four bottom mounting holes. Four (4) of the stock mounting screws can be re-used for the rest of the mounting holes.

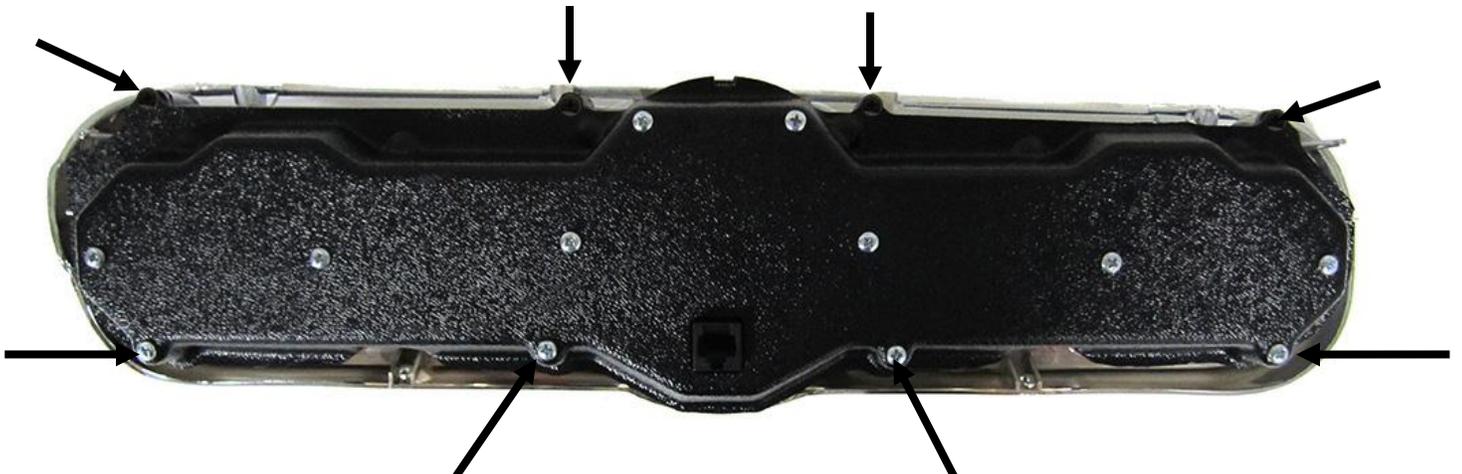

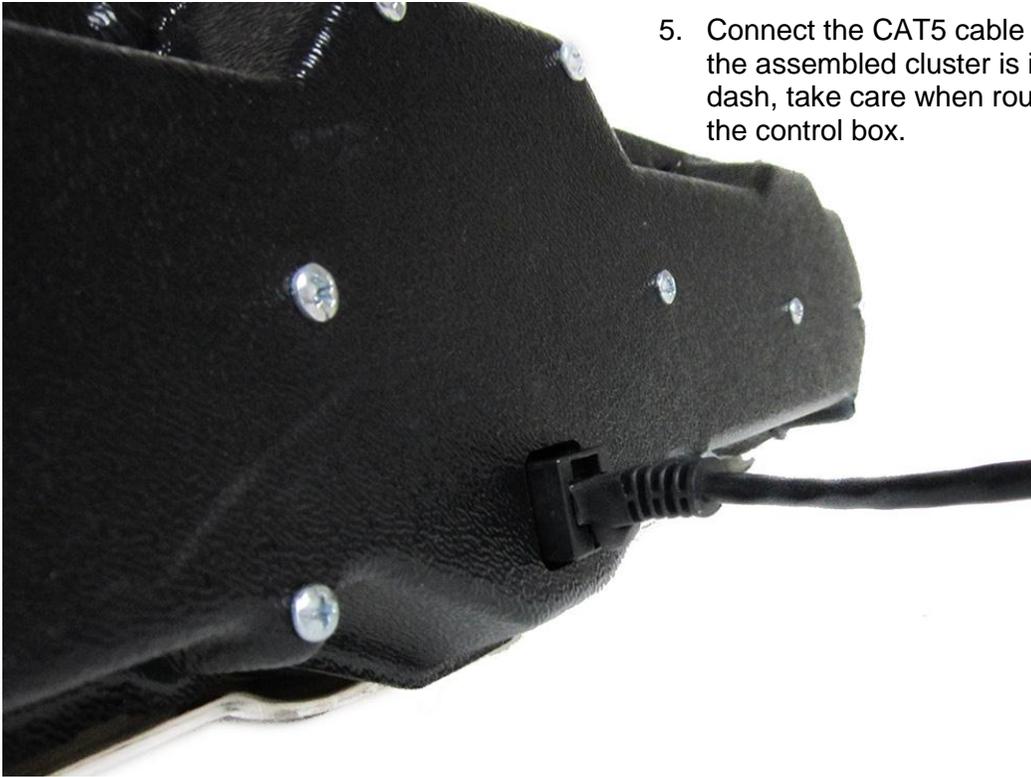

5. Connect the CAT5 cable to the system. As the assembled cluster is installed into the dash, take care when routing this cable to the control box.

6. Re-install the cluster into the dash and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com