



1511 Hancel Parkway

Mooresville, IN 46158

317-837-2444

Seat Rail Extenders

'79~'04 Mustang (Requires one kit per seat)

(SRX-M01)

Stifflers '79-'04 Mustang Seat Rail Extenders moves the front seats 4.25" further back, offering additional legroom for taller drivers and passengers. With our extenders you can enjoy the perfect balance of extra legroom and comfort for an enhanced driving experience.

Kit Includes:

- 2 Seat Rail Extenders
- 4 OEM Style Nuts

Required Tools: Basic hand tools
Vacuum

Install Time: Approximately 30 minutes

Installation:

1. Begin by locating the (2) front 15mm nuts securing the seat and seat bracket to the floor of the vehicle. Now, locate the sliding seat track lever in front of the seat, and slide the seat all the way to the rear position.



2. Using a 15mm socket and ratchet, remove the (2) 15mm nuts securing the front portion of the seat track. Save hardware for a later step.



3. Locate the tilt lever on the back of the seat to tilt the seat forward. Now, relocate the sliding seat track lever in front of the seat, and slide the seat all the way to the forward position.



SRX-M01

www.BuyStifflers.com

Page 1

4. Using a 15mm socket and ratchet, remove the (2) 15mm bolts securing the rear portion of the seat track. Save hardware for a later step. Prepare to



remove the seat from the vehicle.

5. First, be sure to unplug the factory power lumbar connector under the seat. Now you can remove seat from the vehicle.



6. Take this opportunity to vacuum the floor, and clear of any debris.
7. Carefully place the new Stifflers seat rail extenders in place by aligning the fronts up with the factory seat track studs.




8. Using the factory hardware from step 2, secure the front of the new Stifflers seat rail extenders. Torque to 25-34 ft-lbs.



9. Using the factory hardware from step 4, secure the rear of the new Stifflers seat rail extenders. Torque to 25-34 ft-lbs.



10. Place the factory seat back into the vehicle and position in place. Be sure to plug in the factory power lumbar connector.

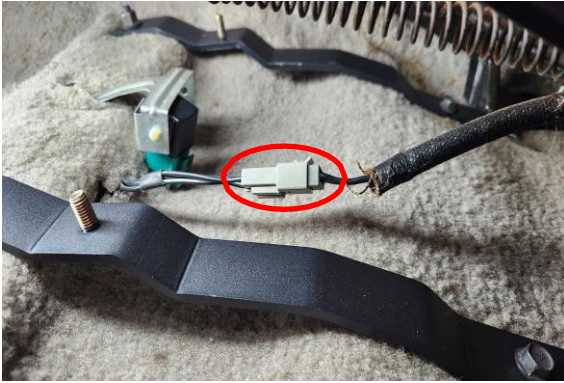

11. With the seat in place on the new seat rail extenders, secure the seat using the supplied (4) OEM style nuts using a 15mm socket and ratchet. Installation is now complete.

